

Schema documentation for job.xsd

may 20, 2011

Table of Contents

Namespace: "http://soap.fax-api.de/2.0/job/types"	2
Schema(s)	2
Main schema job.xsd	2
Element(s)	2
Element jt:GetList	2
Element jt:GetList / jt:authKey	3
Element jt:GetList / jt:jobTitle	3
Element jt:GetList / jt:status	4
Element jt:GetList / jt:period	4
Element jt:period / jt:from	5
Element jt:period / jt:until	5
Element jt:GetListResponse	5
Element jt:GetListResponse / jt:jobList	6
Element jt:JobList / jt:jobList	6
Element jt:APIJob / jt:jobId	7
Element jt:APIJob / jt:jobTitle	7
Element jt:APIJob / jt:status	8
Element jt:APIJob / jt:errorCode	8
Element jt:APIJob / jt:timeToSend	8
Element jt:APIJob / jt:numberOfScheduled	8
Element jt:APIJob / jt:numberOfSuccessful	9
Element jt:APIJob / jt:numberOfErrors	9
Element jt:APIJob / jt:numberOfPages	9
Element jt:GetJob	10
Element jt:GetJob / jt:authKey	10
Element jt:GetJob / jt:jobId	11
Element jt:GetJobResponse	11
Element jt:GetJobResponse / jt:apiJob	11
Element jt:GetJobProfile	12
Element jt:GetJobProfile / jt:authKey	13
Element jt:GetJobProfile / jt:jobId	13
Element jt:GetJobProfileResponse	14
Element jt:GetJobProfileResponse / jt:apiJobProfile	14
Element jt:APIJobProfile / jt:internationalAreaCode	15
Element jt:APIJobProfile / jt:costcenter	16
Element jt:APIJobProfile / jt:ecodiscount	16
Element jt:APIJobProfile / jt:stationId	16
Element jt:APIJobProfile / jt:faxheaderFrom	17
Element jt:APIJobProfile / jt:faxheader	17
Element jt:APIJobProfile / jt:faxheaderImage	17
Element jt:APIJobProfile / jt:archiveTemplate	17
Element jt:APIJobProfile / jt:faxType	18
Element jt:APIJobProfile / jt:demoRecipient	18
Element jt:GetMembers	18
Element jt:GetMembers / jt:authKey	19
Element jt:GetMembers / jt:jobTitle	20
Element jt:GetMembers / jt:status	20
Element jt:GetMembers / jt:period	20
Element jt:GetMembersResponse	21
Element jt:GetMembersResponse / jt:apiJobMemberList	21
Element jt:APIJobMemberList / jt:apiJobMemberList	22
Element jt:APIJobMember / jt:jobId	23
Element jt:APIJobMember / jt:orgfaxnumber	23
Element jt:APIJobMember / jt:name	23
Element jt:APIJobMember / jt:customerReference	24
Element jt:APIJobMember / jt:norfaxnumber	24
Element jt:APIJobMember / jt:internationalareacode	24
Element jt:APIJobMember / jt:accountingunit	25
Element jt:APIJobMember / jt:farezone	25
Element jt:APIJobMember / jt:statuscode	25
Element jt:APIJobMember / jt:transporttime	25
Element jt:GetJobMembers	26
Element jt:GetJobMembers / jt:authKey	26

Element jt:GetJobMembers / jt:jobId	27
Element jt:GetJobMembersResponse	27
Element jt:GetJobMembersResponse / jt:apiJobMemberList	28
Element jt:GetJobCosts	28
Element jt:GetJobCosts / jt:authKey	29
Element jt:GetJobCosts / jt:jobId	29
Element jt:GetJobCostsResponse	29
Element jt:GetJobCostsResponse / jt:costs	30
Element jt:GetTransportStatus	30
Element jt:GetTransportStatus / jt:authKey	31
Element jt:GetTransportStatus / jt:jobId	31
Element jt:GetTransportStatusResponse	31
Element jt:GetTransportStatusResponse / jt:transportStatus	32
Element jt:SetTransportStatus	32
Element jt:SetTransportStatus / jt:authKey	33
Element jt:SetTransportStatus / jt:jobId	33
Element jt:SetTransportStatus / jt:transportStatus	34
Element jt:SetTransportStatusResponse	34
Complex Type(s)	34
Complex Type jt:period	34
Complex Type jt:JobList	35
Complex Type jt:APIJob	35
Complex Type jt:APIJobProfile	36
Complex Type jt:APIJobMemberList	38
Complex Type jt:APIJobMember	39

Namespace: "http://soap.fax-api.de/2.0/job/types"

Schema(s)

Main schema job.xsd

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Type definitions of the so called Job part of the FaxService. Job service is used to control fax jobs. Typdefinitionen des sogenannten Job-Teils des FaxService. Der Job-Service wird für die Steuerung der Faxjobs verwendet.
Properties	attribute form default: unqualified element form default: qualified
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element(s)

Element jt:GetList

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Message used to request a list of current jobs. Nachricht um eine Liste aktueller Jobs anzufordern.
Diagram	<pre> classDiagram class GetList { authKey jobTitle status period } authKey < -- string jobTitle < -- string status < -- string period < -- jt:period </pre>
Properties	content: complex
Model	jt:authKey , jt:jobTitle{0,1} , jt:status{0,1} , jt:period{0,1}
Children	jt:authKey, jt:jobTitle, jt:period, jt:status
Instance	<jt:GetList> <jt:authKey>{1,1}</jt:authKey>

	<pre> <jt:jobTitle>{0,1}</jt:jobTitle> <jt:status>{0,1}</jt:status> <jt:period>{0,1}</jt:period> </jt:GetList> </pre>
Source	<pre> <element name="GetList"> <annotation> <documentation xml:lang="en">Message used to request a list of current jobs.</documentation> <documentation xml:lang="de">Nachricht um eine Liste aktueller Jobs anzufordern.</documentation> </annotation> <complexType> <sequence> <element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element> <element name="jobTitle" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">Name of the requested jobs.</documentation> <documentation xml:lang="de">Name der angeforderten Jobs.</documentation> </annotation> </element> <element name="status" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">State in which the requested jobs are.</documentation> <documentation xml:lang="de">Zustand in dem sich die angeforderte Jobs befinden.</documentation> </annotation> </element> <element name="period" type="jt:period" minOccurs="0"> <annotation> <documentation xml:lang="en">Time period within the time to send of the requested jobs is.</documentation> <documentation xml:lang="de">Zeitraum in dem die Versandzeit des angeforderten Jobs liegt.</documentation> </annotation> </element> </sequence> </complexType> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetList / jt:authKey

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Authorization key.</p> <p>Autorisierungsschlüssel.</p>
Diagram	<pre> classDiagram class authKey { Type string } string authKey "0..1" --> "1..1" string </pre>
Type	string
Properties	content: simple
Source	<pre> <element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetList / jt:jobTitle

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Name of the requested jobs.</p> <p>Name der angeforderten Jobs.</p>
Diagram	<pre> classDiagram class jobTitle { Type string } string jobTitle "0..1" --> "1..1" string </pre>

Type	string
Properties	<p>content: simple</p> <p>minOccurs: 0</p>
Source	<pre><element name="jobTitle" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">Name of the requested jobs.</documentation> <documentation xml:lang="de">Name der angeforderden Jobs.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:.getList / jt:status

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>State in which the requested jobs are.</p> <p>Zustand in dem sich die angeforderte Jobs befinden.</p>
Diagram	<pre>status Type string</pre>
Type	string
Properties	<p>content: simple</p> <p>minOccurs: 0</p>
Source	<pre><element name="status" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">State in which the requested jobs are.</documentation> <documentation xml:lang="de">Zustand in dem sich die angeforderte Jobs befinden.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:getList / jt:period

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Time period within the time to send of the requested jobs is.</p> <p>Zeitraum in dem die Versandzeit des angeforderten Jobs liegt.</p>
Diagram	<pre>jt:period from Type dateTime until Type dateTime</pre>
Type	jt:period
Properties	<p>content: complex</p> <p>minOccurs: 0</p>
Model	jt:from , jt:until
Children	jt:from, jt:until
Instance	<pre><jt:period> <jt:from>{1,1}</jt:from> <jt:until>{1,1}</jt:until> </jt:period></pre>
Source	<pre><element name="period" type="jt:period" minOccurs="0"> <annotation> <documentation xml:lang="en">Time period within the time to send of the requested jobs is.</documentation> <documentation xml:lang="de">Zeitraum in dem die Versandzeit des angeforderten Jobs liegt.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:period / jt:from

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Time the period begins. Anfangszeit des Zeitraums.
Diagram	
Type	dateTime
Properties	content: simple minOccurs: 1
Source	<pre><element name="from" type="dateTime" minOccurs="1"> <annotation> <documentation xml:lang="en">Time the period begins.</documentation> <documentation xml:lang="de">Anfangszeit des Zeitraums.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:period / jt:until


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Time the period ends. Endzeit des Zeitraums.
Diagram	
Type	dateTime
Properties	content: simple minOccurs: 1
Source	<pre><element name="until" type="dateTime" minOccurs="1"> <annotation> <documentation xml:lang="en">Time the period ends.</documentation> <documentation xml:lang="de">Endzeit des Zeitraums.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetListResponse

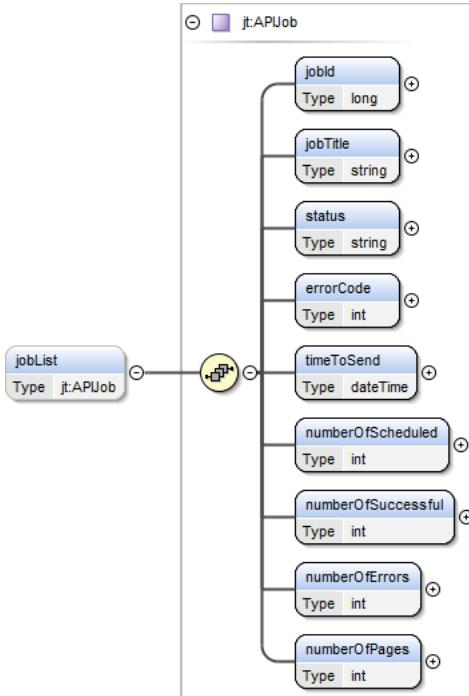
Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Message to deliver a list of jobs matching a GetList request. Nachricht um eine Liste von Jobs passend zu einer GetList-Anforderung zu liefern.
Diagram	
Properties	content: complex
Model	jt:jobList
Children	jt:jobList
Instance	<pre><jt:GetListResponse> <jt:jobList>{1,1}</jt:jobList> </jt:GetListResponse></pre>
Source	<pre><element name="GetListResponse"> <annotation> <documentation xml:lang="en">Message to deliver a list of jobs matching a GetList request.</documentation> <documentation xml:lang="de">Nachricht um eine Liste von Jobs passend zu einer GetList-Anforderung zu liefern.</documentation> </annotation> <complexType> <sequence> <element name="jobList" type="jt:JobList"> <annotation></pre>

	<pre> <documentation xml:lang="en">List of jobs.</documentation> <documentation xml:lang="de">Liste von Jobs.</documentation> </annotation> </element> </sequence> </complexType> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:.getListResponse / jt:jobList


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	List of jobs. Liste von Jobs.
Diagram	 A UML class diagram showing a sequence of jt:APIJob objects. A central box labeled 'jt:JobList' contains a sequence of 'jt:APIJob' objects, each represented by a blue rounded rectangle with a plus sign. An association line connects 'jt:JobList' to 'jt:APIJob' with multiplicity '0..∞'. A small yellow circle with a plus sign is placed on the association line.
Type	jt:JobList
Properties	content: complex
Model	jt:jobList*
Children	jt:jobList
Instance	<jt:jobList> <jt:jobList>{0,unbounded}</jt:jobList> </jt:jobList>
Source	<pre> <element name="jobList" type="jt:JobList"> <annotation> <documentation xml:lang="en">List of jobs.</documentation> <documentation xml:lang="de">Liste von Jobs.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:JobList / jt:jobList

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Job entry. Job-Eintrag.
Diagram	 A UML class diagram showing a jt:APIJob object with several properties. The properties are listed in a vertical stack: jobId (Type long), jobTitle (Type string), status (Type string), errorCode (Type int), timeToSend (Type dateTime), numberOfScheduled (Type int), numberOfRowsSuccessful (Type int), numberOfRowsErrors (Type int), and numberOfRowsPages (Type int). Each property is represented by a blue rounded rectangle with a plus sign.

Type	jt:APIJob
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: unbounded</p>
Model	jt:jobId , jt:jobTitle , jt:status , jt:errorCode , jt:timeToSend , jt:numberOfScheduled , jt:numberOfSuccessful , jt:numberOfErrors , jt:numberOfPages
Children	jt:errorCode, jt:jobId, jt:jobTitle, jt:numberOfErrors, jt:numberOfPages, jt:numberOfScheduled, jt:numberOfSuccessful, jt:status, jt:timeToSend
Instance	<pre><jt:jobList> <jt:jobId>{1,1}</jt:jobId> <jt:jobTitle>{1,1}</jt:jobTitle> <jt:status>{1,1}</jt:status> <jt:errorCode>{1,1}</jt:errorCode> <jt:timeToSend>{1,1}</jt:timeToSend> <jt:numberOfScheduled>{1,1}</jt:numberOfScheduled> <jt:numberOfSuccessful>{1,1}</jt:numberOfSuccessful> <jt:numberOfErrors>{1,1}</jt:numberOfErrors> <jt:numberOfPages>{1,1}</jt:numberOfPages> </jt:jobList></pre>
Source	<pre><element name="jobList" minOccurs="0" maxOccurs="unbounded" type="jt:APIJob"> <annotation> <documentation xml:lang="en">Job entry.</documentation> <documentation xml:lang="de">Job-Eintrag.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd


Element jt:APIJob / jt:jobId

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Identity of the job. Identität des Jobs.
Diagram	
Type	long
Properties	content: simple
Source	<pre><element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the job.</documentation> <documentation xml:lang="de">Identität des Jobs.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd


Element jt:APIJob / jt:jobTitle

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Name of the job. Name des Jobs.
Diagram	
Type	string
Properties	content: simple
Source	<pre><element name="jobTitle" type="string"> <annotation> <documentation xml:lang="en">Name of the job.</documentation> <documentation xml:lang="de">Name des Jobs.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd


Element jt:APIJob / jt:status

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	State of the job (new, ready, scheduling, scheduled, processing, finished, error) Zustand des Jobs (new, ready, scheduling, scheduled, processing, finished, error)
Diagram	
Type	string
Properties	content: simple
Source	<pre><element name="status" type="string"> <annotation> <documentation xml:lang="en">State of the job (new, ready, scheduling, scheduled, processing, finished, error)</documentation> <documentation xml:lang="de">Zustand des Jobs (new, ready, scheduling, scheduled, processing, finished, error)</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJob / jt:errorCode

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Error code: Zero if successful; see table for details. Fehlercode: Null im Erfolgsfall; Details gemäß Liste.
Diagram	
Type	int
Properties	content: simple
Source	<pre><element name="errorCode" type="int"> <annotation> <documentation xml:lang="en">Error code: Zero if successful; see table for details.</documentation> <documentation xml:lang="de">Fehlercode: Null im Erfolgsfall; Details gemäß Liste.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJob / jt:timeToSend

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Scheduled time to send the fax to recipients. Zeit zu der geplant ist, dass Fax an die Empfänger zu geschicken.
Diagram	
Type	dateTime
Properties	content: simple
Source	<pre><element name="timeToSend" type="dateTime"> <annotation> <documentation xml:lang="en">Scheduled time to send the fax to recipients.</documentation> <documentation xml:lang="de">Zeit zu der geplant ist, dass Fax an die Empfänger zu geschicken.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJob / jt:numberOfScheduled

Namespace	http://soap.fax-api.de/2.0/job/types
-----------	--------------------------------------

Annotations	Number of scheduled recipients. Anzahl geplanter Empfänger.
Diagram	
Type	int
Properties	content: simple
Source	<pre><element name="numberOfScheduled" type="int"> <annotation> <documentation xml:lang="en">Number of scheduled recipients.</documentation> <documentation xml:lang="de">Anzahl geplanter Empfänger.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJob / jt:numberOfSuccessful

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Number of successful transmitted faxes to recipients. Anzahl der erfolgreich an Empfänger versendeter Faxdokumente.
Diagram	
Type	int
Properties	content: simple
Source	<pre><element name="numberOfSuccessful" type="int"> <annotation> <documentation xml:lang="en">Number of successful transmitted faxes to recipients.</documentation> <documentation xml:lang="de">Anzahl der erfolgreich an Empfänger versendeter Faxdokumente.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJob / jt:numberOfErrors

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Number of not reachable recipients. Anzahl der nicht erreichbaren Empfänger.
Diagram	
Type	int
Properties	content: simple
Source	<pre><element name="numberOfErrors" type="int"> <annotation> <documentation xml:lang="en">Number of not reachable recipients.</documentation> <documentation xml:lang="de">Anzahl der nicht erreichbaren Empfänger.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJob / jt:numberOfPages

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Number of pages per recipient. Anzahl der Seiten pro Empfänger.
Diagram	

Type	int
Properties	content: simple
Source	<pre><element name="numberOfPages" type="int"> <annotation> <documentation xml:lang="en">Number of pages per recipient.</documentation> <documentation xml:lang="de">Anzahl der Seiten pro Empfänger.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJob

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Message to specifically request a single job by its identity.</p> <p>Nachricht um genau einen Job mittels seiner Identität anzufordern.</p>
Diagram	<pre> classDiagram class GetJob { <<GetJob>> } class authKey { <<authKey>> string } class jobId { <<jobId>> long } GetJob --> authKey GetJob --> jobId </pre>
Properties	content: complex
Model	jt:authKey , jt:jobId
Children	jt:authKey, jt:jobId
Instance	<pre><jt:GetJob> <jt:authKey>{1,1}</jt:authKey> <jt:jobId>{1,1}</jt:jobId> </jt:GetJob></pre>
Source	<pre><element name="GetJob"> <annotation> <documentation xml:lang="en">Message to specifically request a single job by its identity.</documentation> <documentation xml:lang="de">Nachricht um genau einen Job mittels seiner Identität anzufordern.</documentation> </annotation> <complexType> <sequence> <element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element> <element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the requested job.</documentation> <documentation xml:lang="de">Identität des angeforderten Jobs.</documentation> </annotation> </element> </sequence> </complexType> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJob / jt:authKey

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Authorization key.</p> <p>Autorisierungsschlüssel.</p>
Diagram	<pre> class authKey { <<authKey>> string } </pre>
Type	string
Properties	content: simple
Source	<pre><element name="authKey" type="string"></pre>

	<pre> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJob / jt:jobId

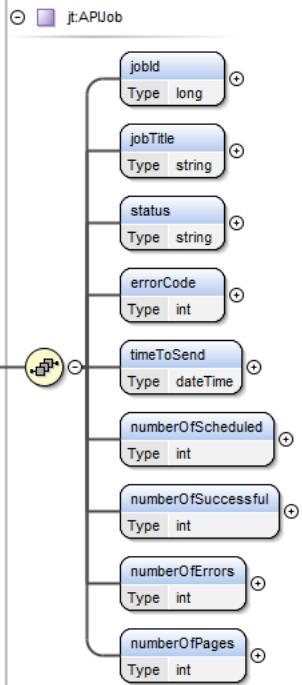
Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Identity of the requested job. Identität des angeforderten Jobs.
Diagram	
Type	long
Properties	content: simple
Source	<pre> <element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the requested job.</documentation> <documentation xml:lang="de">Identität des angeforderten Jobs.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobResponse


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Message to deliver a specific job request. Nachricht um einen bestimmten Job zu einer Anfrage zu liefern.
Diagram	
Properties	content: complex
Model	jt:apiJob
Children	jt:apiJob
Instance	<pre> <jt:GetJobResponse> <jt:apiJob>{1,1}</jt:apiJob> </jt:GetJobResponse> </pre>
Source	<pre> <element name="GetJobResponse"> <annotation> <documentation xml:lang="en">Message to deliver a specific job request.</documentation> <documentation xml:lang="de">Nachricht um einen bestimmten Job zu einer Anfrage zu liefern.</documentation> </annotation> <complexType> <sequence> <element name="apiJob" type="jt:APIJob"> <annotation> <documentation xml:lang="en">Description of job.</documentation> <documentation xml:lang="de">Jobbeschreibung.</documentation> </annotation> </element> </sequence> </complexType> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobResponse / jt:apiJob

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Description of job. Jobbeschreibung.

Diagram	
Type	jt:APIJob
Properties	content: complex
Model	jt:jobId , jt:jobTitle , jt:status , jt:errorCode , jt:timeToSend , jt:numberOfScheduled , jt:numberOfSuccessful , jt:numberOfErrors , jt:numberOfPages
Children	jt:errorCode, jt:jobId, jt:jobTitle, jt:numberOfErrors, jt:numberOfPages, jt:numberOfScheduled, jt:numberOfSuccessful, jt:status, jt:timeToSend
Instance	<pre><jt:apiJob> <jt:jobId>{1,1}</jt:jobId> <jt:jobTitle>{1,1}</jt:jobTitle> <jt:status>{1,1}</jt:status> <jt:errorCode>{1,1}</jt:errorCode> <jt:timeToSend>{1,1}</jt:timeToSend> <jt:numberOfScheduled>{1,1}</jt:numberOfScheduled> <jt:numberOfSuccessful>{1,1}</jt:numberOfSuccessful> <jt:numberOfErrors>{1,1}</jt:numberOfErrors> <jt:numberOfPages>{1,1}</jt:numberOfPages> </jt:apiJob></pre>
Source	<pre><element name="apiJob" type="jt:APIJob"> <annotation> <documentation xml:lang="en">Description of job.</documentation> <documentation xml:lang="de">Jobbeschreibung.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobProfile

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Message to request the account settings in effect for the given job. Nachricht um die für einen Job wirksamen Kontoeinstellungen anzufragen.
Diagram	
Properties	content: complex
Model	jt:authKey , jt:jobId
Children	jt:authKey, jt:jobId

Instance	<pre><jt:GetJobProfile> <jt:authKey>{1,1}</jt:authKey> <jt:jobId>{1,1}</jt:jobId> </jt:GetJobProfile></pre>
Source	<pre><element name="GetJobProfile"> <annotation> <documentation xml:lang="en">Message to request the account settings in effect for the given job.</documentation> <documentation xml:lang="de">Nachricht um die für einen Job wirksamen Kontoeinstellungen anzufordern.</documentation> </annotation> <complexType> <sequence> <element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element> <element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the requested job profile.</documentation> <documentation xml:lang="de">Identität des angeforderten Jobprofils.</documentation> </annotation> </element> </sequence> </complexType> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobProfile / jt:authKey

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Authorization key. Autorisierungsschlüssel.
Diagram	<pre>classDiagram class authKey { Type string } string <--○ authKey</pre>
Type	string
Properties	content: simple
Source	<pre><element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobProfile / jt:jobId

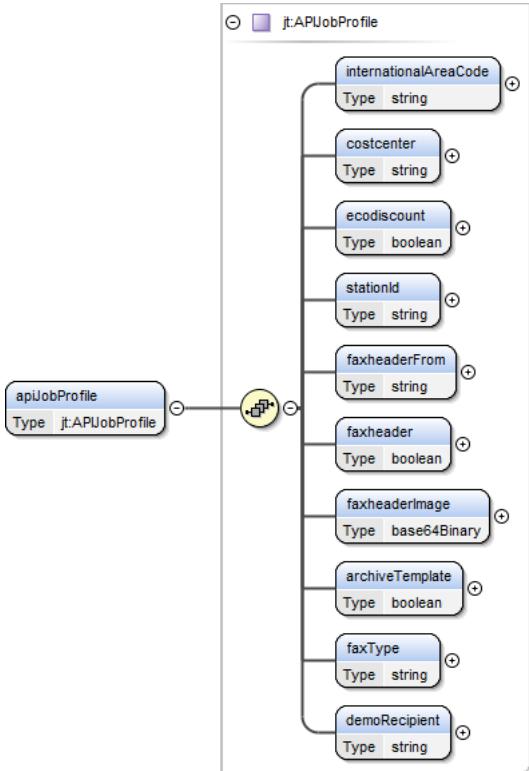
Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Identity of the requested job profile. Identität des angeforderten Jobprofils.
Diagram	<pre>classDiagram class jobId { Type long } long <--○ jobId</pre>
Type	long
Properties	content: simple
Source	<pre><element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the requested job profile.</documentation> <documentation xml:lang="de">Identität des angeforderten Jobprofils.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobProfileResponse

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Message to deliver effective account settings.</p> <p>Nachricht um die wirksamen Kontoeinstellungen zu liefern.</p>
Diagram	A UML class diagram fragment showing two classes: 'GetJobProfileResponse' and 'apiJobProfile'. 'GetJobProfileResponse' has a multiplicity of 1..* at its end of the association with 'apiJobProfile'. 'apiJobProfile' has a multiplicity of 0..1 at its end of the association with 'GetJobProfileResponse'. Both classes have a small yellow circle with a plus sign inside them, indicating they are stereotypes.
Properties	content: complex
Model	jt:apiJobProfile
Children	jt:apiJobProfile
Instance	<pre><jt:GetJobProfileResponse> <jt:apiJobProfile>{1,1}</jt:apiJobProfile> </jt:GetJobProfileResponse></pre>
Source	<pre><element name="GetJobProfileResponse"> <annotation> <documentation xml:lang="en">Message to deliver effective account settings.</documentation> <documentation xml:lang="de">Nachricht um die wirksamen Kontoeinstellungen zu liefern.</documentation> </annotation> <complexType> <sequence> <element name="apiJobProfile" type="jt:APIJobProfile"> <annotation> <documentation xml:lang="en">Account profile.</documentation> <documentation xml:lang="de">Kontoausprägung.</documentation> </annotation> </element> </sequence> </complexType> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobProfileResponse / jt:apiJobProfile

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Account profile.</p> <p>Kontoausprägung.</p>

Diagram	
Type	jt:APIJobProfile
Properties	content: complex
Model	jt:internationalAreaCode , jt:costcenter , jt:ecodiscount , jt:stationId , jt:faxheaderFrom , jt:faxheader , jt:faxheaderImage , jt:archiveTemplate , jt:faxType , jt:demoRecipient
Children	jt:archiveTemplate, jt:costcenter, jt:demoRecipient, jt:ecodiscount, jt:faxType, jt:faxheader, jt:faxheaderFrom, jt:faxheaderImage, jt:internationalAreaCode, jt:stationId
Instance	<pre><jt:apiJobProfile> <jt:internationalAreaCode>{1,1}</jt:internationalAreaCode> <jt:costcenter>{1,1}</jt:costcenter> <jt:ecodiscount>{1,1}</jt:ecodiscount> <jt:stationId>{1,1}</jt:stationId> <jt:faxheaderFrom>{1,1}</jt:faxheaderFrom> <jt:faxheader>{1,1}</jt:faxheader> <jt:faxheaderImage>{1,1}</jt:faxheaderImage> <jt:archiveTemplate>{1,1}</jt:archiveTemplate> <jt:faxType>{1,1}</jt:faxType> <jt:demoRecipient>{1,1}</jt:demoRecipient> </jt:apiJobProfile></pre>
Source	<pre><element name="apiJobProfile" type="jt:APIJobProfile"> <annotation> <documentation xml:lang="en">Account profile.</documentation> <documentation xml:lang="de">Kontoausprägung.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobProfile / jt:internationalAreaCode

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	International area code of the sender. Ländervorwahl des Absenders
Diagram	
Type	string
Properties	content: simple
Source	<pre><element name="internationalAreaCode" type="string"></pre>

	<pre> <annotation> <documentation xml:lang="en">International area code of the sender.</documentation> <documentation xml:lang="de">Ländervorwahl des Absenders</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobProfile / jt:costcenter

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Cost center of customer. Kostenstelle des Kunden.
Diagram	
Type	string
Properties	content: simple
Source	<pre> <element name="costcenter" type="string"> <annotation> <documentation xml:lang="en">Cost center of customer.</documentation> <documentation xml:lang="de">Kostenstelle des Kunden.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobProfile / jt:ecodiscount

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Use discount time period to send faxes. Benutze Nebenzeitz zum Versand.
Diagram	
Type	boolean
Properties	content: simple
Source	<pre> <element name="ecodiscount" type="boolean"> <annotation> <documentation xml:lang="en">Use discount time period to send faxes.</documentation> <documentation xml:lang="de">Benutze Nebenzeitz zum Versand.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobProfile / jt:stationId

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Fax station identifier (Sender transmitted to the recipients). Faxgerätkennung (Absender der an die Empfänger übertragen wird).
Diagram	
Type	string
Properties	content: simple
Source	<pre> <element name="stationId" type="string"> <annotation> <documentation xml:lang="en">Fax station identifier (Sender transmitted to the recipients).</documentation> <documentation xml:lang="de">Faxgerätkennung (Absender der an die Empfänger übertragen wird).</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobProfile / jt:faxheaderFrom

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Sender text displayed in the header. Absendertext in der Kopfzeile.
Diagram	
Type	string
Properties	content: simple
Source	<pre><element name="faxheaderFrom" type="string"> <annotation> <documentation xml:lang="en">Sender text displayed in the header.</documentation> <documentation xml:lang="de">Absendertext in der Kopfzeile.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobProfile / jt:faxheader


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Enable or disable displaying the header. Anzeigen der Kopfzeile ein- oder ausschalten.
Diagram	
Type	boolean
Properties	content: simple
Source	<pre><element name="faxheader" type="boolean"> <annotation> <documentation xml:lang="en">Enable or disable displaying the header.</documentation> <documentation xml:lang="de">Anzeigen der Kopfzeile ein- oder ausschalten.</ documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobProfile / jt:faxheaderImage


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Image of the header. Bild der Kopfzeile.
Diagram	
Type	base64Binary
Properties	content: simple
Source	<pre><element name="faxheaderImage" type="base64Binary"> <annotation> <documentation xml:lang="en">Image of the header.</documentation> <documentation xml:lang="de">Bild der Kopfzeile.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobProfile / jt:archiveTemplate

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Archive template document for fax generation. Archiviert die Dokumentenvorlage für die FAXerzeugung.

Diagram	
Type	boolean
Properties	content: simple
Source	<pre><element name="archiveTemplate" type="boolean"> <annotation> <documentation xml:lang="en">Archive template document for fax generation.</documentation> <documentation xml:lang="de">Archiviert die Dokumentenvorlage für die Faxerzeugung.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobProfile / jt:faxType

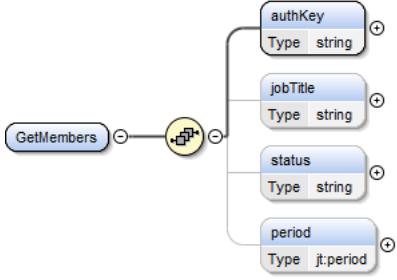
Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Specifies the dialing behaviour of the FaxService. Allowed values are "normal" and "speedfax". "speedfax" redials busy or unreachable recipients faster.</p> <p>Gibt das Anwahlverhalten des FaxService an. Zulässige Werte sind "normal" und "speedfax". "speedfax" wählt besetzte oder unerreichbare Empfänger schneller wieder an.</p>
Diagram	
Type	string
Properties	content: simple
Source	<pre><element name="faxType" type="string"> <annotation> <documentation xml:lang="en">Specifies the dialing behaviour of the FaxService. Allowed values are "normal" and "speedfax". "speedfax" redials busy or unreachable recipients faster.</documentation> <documentation xml:lang="de">Gibt das Anwahlverhalten des FaxService an. Zulässige Werte sind "normal" und "speedfax". "speedfax" wählt besetzte oder unerreichbare Empfänger schneller wieder an.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobProfile / jt:demoRecipient


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Email address to receive outgoing faxes for demo purposes.</p> <p>Emailadresse um ausgehende Faxe für Demozwecke zu empfangen.</p>
Diagram	
Type	string
Properties	content: simple
Source	<pre><element name="demoRecipient" type="string"> <annotation> <documentation xml:lang="en">Email address to receive outgoing faxes for demo purposes.</documentation> <documentation xml:lang="de">Emailadresse um ausgehende Faxe für Demozwecke zu empfangen.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetMembers

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Message to request members.</p> <p>Nachricht um Members anzufordern.</p>

Diagram	
Properties	content: complex
Model	jt:authKey , jt:jobTitle{0,1} , jt:status{0,1} , jt:period{0,1}
Children	jt:authKey, jt:jobTitle, jt:period, jt:status
Instance	<pre><jt:GetMembers> <jt:authKey>{1,1}</jt:authKey> <jt:jobTitle>{0,1}</jt:jobTitle> <jt:status>{0,1}</jt:status> <jt:period>{0,1}</jt:period> </jt:GetMembers></pre>
Source	<pre><element name="GetMembers"> <annotation> <documentation xml:lang="en">Message to request members.</documentation> <documentation xml:lang="de">Nachricht um Members anzufordern.</documentation> </annotation> <complexType> <sequence> <element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element> <element name="jobTitle" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">Name of the requested jobs.</documentation> <documentation xml:lang="de">Name der angeforderten Jobs.</documentation> </annotation> </element> <element name="status" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">State of the job the requested job members belongs to.</documentation> <documentation xml:lang="de">Zustand des Job zu dem die angeforderte Job-Members gehören.</documentation> </annotation> </element> <element name="period" type="jt:period" minOccurs="0"> <annotation> <documentation xml:lang="en">Time period within the time to send of the job is to which the requested members belongs.</documentation> <documentation xml:lang="de">Zeitraum in dem die Versandzeit des Jobs liegt zu dem die angeforderten Members gehören.</documentation> </annotation> </element> </sequence> </complexType> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetMembers / jt:authKey

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Authorization key. Autorisierungsschlüssel.
Diagram	
Type	string
Properties	content: simple
Source	<pre><element name="authKey" type="string"></pre>

	<pre> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetMembers / jt:jobTitle

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Name of the requested jobs. Name der angeforderten Jobs.
Diagram	
Type	string
Properties	content: simple minOccurs: 0
Source	<pre> <element name="jobTitle" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">Name of the requested jobs.</documentation> <documentation xml:lang="de">Name der angeforderten Jobs.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetMembers / jt:status

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	State of the job the requested job members belongs to. Zustand des Job zu dem die angeforderte Job-Members gehören.
Diagram	
Type	string
Properties	content: simple minOccurs: 0
Source	<pre> <element name="status" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">State of the job the requested job members belongs to.</documentation> <documentation xml:lang="de">Zustand des Job zu dem die angeforderte Job-Members gehören.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetMembers / jt:period

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Time period within the time to send of the job is to which the requested members belongs. Zeitraum in dem die Versandzeit des Jobs liegt zu dem die angeforderten Members gehören.
Diagram	
Type	jt:period
Properties	content: complex

	minOccurs: 0
Model	jt:from , jt:until
Children	jt:from, jt:until
Instance	<pre><jt:period> <jt:from>{1,1}</jt:from> <jt:until>{1,1}</jt:until> </jt:period></pre>
Source	<pre><element name="period" type="jt:period" minOccurs="0"> <annotation> <documentation xml:lang="en">Time period within the time to send of the job is to which the requested members belongs.</documentation> <documentation xml:lang="de">Zeitraum in dem die Versandzeit des Jobs liegt zu dem die angeforderten Members gehören.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetMembersResponse

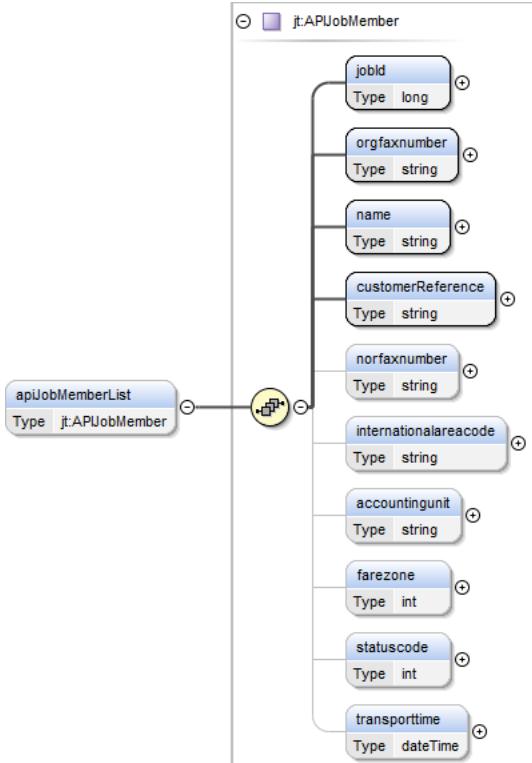
Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Message to deliver recipient configurations.</p> <p>Nachricht um Empfängerkonfigurationen zu liefern.</p>
Diagram	<pre> classDiagram class GetMembersResponse { <<complex type>> } class apiJobMemberList { <<list type>> } GetMembersResponse "1" -- "*" apiJobMemberList </pre>
Properties	content: complex
Model	jt:apiJobMemberList
Children	jt:apiJobMemberList
Instance	<pre><jt:GetMembersResponse> <jt:apiJobMemberList>{1,1}</jt:apiJobMemberList> </jt:GetMembersResponse></pre>
Source	<pre><element name="GetMembersResponse"> <annotation> <documentation xml:lang="en">Message to deliver recipient configurations.</ documentation> <documentation xml:lang="de">Nachricht um Empfängerkonfigurationen zu liefern.</ documentation> </annotation> <complexType> <sequence> <element name="apiJobMemberList" type="jt:APIJobMemberList"> <annotation> <documentation xml:lang="en">List of recipient configurations.</documentation> <documentation xml:lang="de">Liste von Empfängerkonfigurationen.</documentation> </annotation> </element> </sequence> </complexType> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetMembersResponse / jt:apiJobMemberList

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>List of recipient configurations.</p> <p>Liste von Empfängerkonfigurationen.</p>
Diagram	<pre> classDiagram class apiJobMemberList { <<list type>> } class jtAPIJobMemberList { <<complex type>> } apiJobMemberList "*" -- "0..>" jtAPIJobMemberList </pre>
Type	jt:APIJobMemberList
Properties	content: complex
Model	jt:apiJobMemberList*


Children	jt:apiJobMemberList
Instance	<jt:apiJobMemberList> <jt:apiJobMemberList>{0,unbounded}</jt:apiJobMemberList> </jt:apiJobMemberList>
Source	<element name="apiJobMemberList" type="jt:APIJobMemberList"> <annotation> <documentation xml:lang="en">List of recipient configurations.</documentation> <documentation xml:lang="de">Liste von Empfängerkonfigurationen.</documentation> </annotation> </element>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobMemberList / jt:apiJobMemberList

Namespace	http://soap.fax-api.de/2.0/job/types						
Annotations	List of recipient configurations. Liste von Empfängerkonfigurationen.						
Diagram							
Type	jt:APIJobMember						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>unbounded</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	unbounded
content:	complex						
minOccurs:	0						
maxOccurs:	unbounded						
Model	jt:jobId , jt:orgfaxnumber , jt:name , jt:customerReference , jt:norfaxnumber{0,1} , jt:internationalareacode{0,1} , jt:accountingunit{0,1} , jt:farezone{0,1} , jt:statuscode{0,1} , jt:transporttime{0,1}						
Children	jt:accountingunit, jt:customerReference, jt:farezone, jt:internationalareacode, jt:jobId, jt:name, jt:norfaxnumber, jt:orgfaxnumber, jt:statuscode, jt:transporttime						
Instance	<jt:apiJobMemberList> <jt:jobId>{1,1}</jt:jobId> <jt:orgfaxnumber>{1,1}</jt:orgfaxnumber> <jt:name>{1,1}</jt:name> <jt:customerReference>{1,1}</jt:customerReference> <jt:norfaxnumber>{0,1}</jt:norfaxnumber> <jt:internationalareacode>{0,1}</jt:internationalareacode> <jt:accountingunit>{0,1}</jt:accountingunit> <jt:farezone>{0,1}</jt:farezone> <jt:statuscode>{0,1}</jt:statuscode> <jt:transporttime>{0,1}</jt:transporttime> </jt:apiJobMemberList>						

Source	<pre><element name="apiJobMemberList" minOccurs="0" maxOccurs="unbounded" type="jt:APIJobMember"> <annotation> <documentation xml:lang="en">List of recipient configurations.</documentation> <documentation xml:lang="de">Liste von Empfängerkonfigurationen.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd


Element jt:APIJobMember / jt:jobId

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Identity of the job. Identität des Jobs.
Diagram	
Type	long
Properties	content: simple
Source	<pre><element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the job.</documentation> <documentation xml:lang="de">Identität des Jobs.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobMember / jt:orgfaxnumber

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Recipient fax number in original form transmitted by the sender. Empfängerfaxnummer in der vom Versender übermittelten Originalform.
Diagram	
Type	string
Properties	content: simple
Source	<pre><element name="orgfaxnumber" type="string"> <annotation> <documentation xml:lang="en">Recipient fax number in original form transmitted by the sender.</documentation> <documentation xml:lang="de">Empfängerfaxnummer in der vom Versender übermittelten Originalform.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobMember / jt:name

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Name of the recipient. Name des Empfängers.
Diagram	
Type	string
Properties	content: simple
Source	<pre><element name="name" type="string"> <annotation> <documentation xml:lang="en">Name of the recipient.</documentation> <documentation xml:lang="de">Name des Empfängers.</documentation> </annotation> </element></pre>

	</element>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobMember / jt:customerReference

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Customers reference Kundenreferenz
Diagram	
Type	string
Properties	content: simple
Source	<pre><element name="customerReference" type="string"> <annotation> <documentation xml:lang="en">Customers reference</documentation> <documentation xml:lang="de">Kundenreferenz</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd


Element jt:APIJobMember / jt:norfaxnumber

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Recipient fax number in normalized form. Empfängerfaxnummer in normalisierter Form.
Diagram	
Type	string
Properties	content: simple minOccurs: 0
Source	<pre><element name="norfaxnumber" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">Recipient fax number in normalized form.</documentation> <documentation xml:lang="de">Empfängerfaxnummer in normalisierter Form.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobMember / jt:internationalareacode

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Internal area code of the recipient with leading zeros. Länderkennzahl mit führenden Nullen.
Diagram	
Type	string
Properties	content: simple minOccurs: 0
Source	<pre><element name="internationalareacode" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">Internal area code of the recipient with leading zeros.</documentation> <documentation xml:lang="de">Länderkennzahl mit führenden Nullen.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd


Element jt:APIJobMember / jt:accountingunit

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Accounting unit. Abrechnungseinheit.
Diagram	
Type	string
Properties	content: simple minOccurs: 0
Source	<pre><element name="accountingunit" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">Accounting unit.</documentation> <documentation xml:lang="de">Abrechnungseinheit.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobMember / jt:farezone

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Fare zone (1: national, 2: international 1, 3: international 2) Tarifzone (1: national, 2: international 1, 3: international 2)
Diagram	
Type	int
Properties	content: simple minOccurs: 0
Source	<pre><element name="farezone" type="int" minOccurs="0"> <annotation> <documentation xml:lang="en">Fare zone (1: national, 2: international 1, 3: international 2)</documentation> <documentation xml:lang="de">Tarifzone (1: national, 2: international 1, 3: international 2)</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobMember / jt:statuscode


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	State of dispatch. Zustand des Versands.
Diagram	
Type	int
Properties	content: simple minOccurs: 0
Source	<pre><element name="statuscode" type="int" minOccurs="0"> <annotation> <documentation xml:lang="en">State of dispatch.</documentation> <documentation xml:lang="de">Zustand des Versands.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:APIJobMember / jt:transporttime

Namespace	http://soap.fax-api.de/2.0/job/types
-----------	--------------------------------------

Annotations	Time of dispatch. Ausführungszeit des Versands.
Diagram	
Type	dateTime
Properties	content: simple minOccurs: 0
Source	<element name="transporttime" type="dateTime" minOccurs="0"> <annotation> <documentation xml:lang="en">Time of dispatch.</documentation> <documentation xml:lang="de">Ausführungszeit des Versands.</documentation> </annotation> </element>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobMembers


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Message to request recipient configurations of a specific job. Nachricht um Empfängerkonfigurationen genau eines Jobs anzufordern.
Diagram	
Properties	content: complex
Model	jt:authKey , jt:jobId
Children	jt:authKey, jt:jobId
Instance	<jt:GetJobMembers> <jt:authKey>{1,1}</jt:authKey> <jt:jobId>{1,1}</jt:jobId> </jt:GetJobMembers>
Source	<element name="GetJobMembers"> <annotation> <documentation xml:lang="en">Message to request recipient configurations of a specific job.</documentation> <documentation xml:lang="de">Nachricht um Empfängerkonfigurationen genau eines Jobs anzufordern.</documentation> </annotation> <complexType> <sequence> <element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> <element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the job the requested recipient configurations belongs to.</documentation> <documentation xml:lang="de">Identität des Jobs zu dem die angeforderten Empfängerkonfiguration gehören.</documentation> </annotation> </element> </sequence> </complexType> </element>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobMembers / jt:authKey

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Authorization key. Autorisierungsschlüssel.

Diagram	
Type	string
Properties	content: simple
Source	<pre><element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobMembers / jt:jobId


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Identity of the job the requested recipient configurations belongs to. Identität des Jobs zu dem die angefordernden Empfängerkonfiguration gehören.
Diagram	
Type	long
Properties	content: simple
Source	<pre><element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the job the requested recipient configurations belongs to.</documentation> <documentation xml:lang="de">Identität des Jobs zu dem die angefordernden Empfängerkonfiguration gehören.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobMembersResponse


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Message to deliver recipient configurations. Nachricht um Empfängerkonfigurationen zu liefern.
Diagram	
Properties	content: complex
Model	jt:apiJobMemberList
Children	jt:apiJobMemberList
Instance	<pre><jt:GetJobMembersResponse> <jt:apiJobMemberList>{1,1}</jt:apiJobMemberList> </jt:GetJobMembersResponse></pre>
Source	<pre><element name="GetJobMembersResponse"> <annotation> <documentation xml:lang="en">Message to deliver recipient configurations.</documentation> <documentation xml:lang="de">Nachricht um Empfängerkonfigurationen zu liefern.</documentation> </annotation> <complexType> <sequence> <element name="apiJobMemberList" type="jt:APIJobMemberList"> <annotation> <documentation xml:lang="en">List of recipient configurations.</documentation> <documentation xml:lang="de">Liste von Empfängerkonfigurationen.</documentation> </annotation> </element> </sequence> </complexType> </element></pre>

Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd
-----------------	---

Element jt:GetJobMembersResponse / jt:apiJobMemberList


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	List of recipient configurations. Liste von Empfängerkonfigurationen.
Diagram	
Type	jt:APIJobMemberList
Properties	content: complex
Model	jt:apiJobMemberList*
Children	jt:apiJobMemberList
Instance	<jt:apiJobMemberList> <jt:apiJobMemberList>{0,unbounded}</jt:apiJobMemberList> </jt:apiJobMemberList>
Source	<pre><element name="apiJobMemberList" type="jt:APIJobMemberList"> <annotation> <documentation xml:lang="en">List of recipient configurations.</documentation> <documentation xml:lang="de">Liste von Empfängerkonfigurationen.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobCosts


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Message to request the arisen costs of a job. Nachricht um die angefallenen Kosten eines Jobs anzufordern.
Diagram	
Properties	content: complex
Model	jt:authKey , jt:jobId
Children	jt:authKey, jt:jobId
Instance	<jt:GetJobCosts> <jt:authKey>{1,1}</jt:authKey> <jt:jobId>{1,1}</jt:jobId> </jt:GetJobCosts>
Source	<pre><element name="GetJobCosts"> <annotation> <documentation xml:lang="en">Message to request the arisen costs of a job.</documentation> <documentation xml:lang="de">Nachricht um die angefallenen Kosten eines Jobs anzufordern.</documentation> </annotation> <complexType> <sequence> <element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element> <element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the job which costs are requested.</documentation> <documentation xml:lang="de">Identität des Jobs dessen Kosten angefragt werden.</documentation> </annotation> </element> </sequence> </complexType> </element></pre>

	<pre> </annotation> </element> </sequence> </complexType> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd


Element jt:GetJobCosts / jt:authKey

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Authorization key. Autorisierungsschlüssel.
Diagram	
Type	string
Properties	content: simple
Source	<pre> <element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobCosts / jt:jobId

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Identity of the job which costs are requested. Identität des Jobs dessen Kosten angefragt werden.
Diagram	
Type	long
Properties	content: simple
Source	<pre> <element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the job which costs are requested.</documentation> <documentation xml:lang="de">Identität des Jobs dessen Kosten angefragt werden.</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobCostsResponse

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Message to deliver the cost of a job. Nachricht um die Kosten eines Jobs zu liefern.
Diagram	
Properties	content: complex
Model	jt:costs
Children	jt:costs
Instance	<pre> <jt:GetJobCostsResponse> <jt:costs>{1,1}</jt:costs> </jt:GetJobCostsResponse></pre>
Source	<pre> <element name="GetJobCostsResponse"> <annotation> <documentation xml:lang="en">Message to deliver the cost of a job.</documentation></pre>

	<pre> <documentation xml:lang="de">Nachricht um die Kosten eines Jobs zu liefern.</documentation> </annotation> <complexType> <sequence> <element name="costs" type="double"> <annotation> <documentation xml:lang="en">Job costs in euro.</documentation> <documentation xml:lang="de">Jobkosten in Euro.</documentation> </annotation> </element> </sequence> </complexType> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetJobCostsResponse / jt:costs

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Job costs in euro. Jobkosten in Euro.
Diagram	
Type	double
Properties	content: simple
Source	<pre> <element name="costs" type="double"> <annotation> <documentation xml:lang="en">Job costs in euro.</documentation> <documentation xml:lang="de">Jobkosten in Euro.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetTransportStatus

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Message to request the execution state of a job. Nachricht um den Ausführungsstatus eines Jobs anzufordern.
Diagram	
Properties	content: complex
Model	jt:authKey , jt:jobId
Children	jt:authKey, jt:jobId
Instance	<pre> <jt:GetTransportStatus> <jt:authKey>{1,1}</jt:authKey> <jt:jobId>{1,1}</jt:jobId> </jt:GetTransportStatus> </pre>
Source	<pre> <element name="GetTransportStatus"> <annotation> <documentation xml:lang="en">Message to request the execution state of a job.</documentation> <documentation xml:lang="de">Nachricht um den Ausführungsstatus eines Jobs anzufordern.</documentation> </annotation> <complexType> <sequence> <element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element> <element name="jobId" type="long"> </pre>

	<pre> <annotation> <documentation xml:lang="en">Identity of the job which execution state is requested.</documentation> <documentation xml:lang="de">Identität des Jobs dessen Ausführungszustand angefragt wird.</documentation> </annotation> </element> </sequence> </complexType> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetTransportStatus / jt:authKey

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Authorization key.</p> <p>Autorisierungsschlüssel.</p>
Diagram	
Type	string
Properties	content: simple
Source	<pre> <element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetTransportStatus / jt:jobId

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Identity of the job which execution state is requested.</p> <p>Identität des Jobs dessen Ausführungszustand angefragt wird.</p>
Diagram	
Type	long
Properties	content: simple
Source	<pre> <element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the job which execution state is requested.</ documentation> <documentation xml:lang="de">Identität des Jobs dessen Ausführungszustand angefragt wird.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetTransportStatusResponse

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Message to deliver the execution state of a job.</p> <p>Nachricht um den Ausführungszustand eines Jobs zu liefern.</p>
Diagram	
Properties	content: complex
Model	jt:transportStatus
Children	jt:transportStatus
Instance	<jt:GetTransportStatusResponse>

	<jt:transportStatus>{1,1}</jt:transportStatus> </jt:GetTransportStatusResponse>
Source	<pre> <element name="GetTransportStatusResponse"> <annotation> <documentation xml:lang="en">Message to deliver the execution state of a job.</documentation> <documentation xml:lang="de">Nachricht um den Ausführzungszustand eines Jobs zu liefern.</documentation> </annotation> <complexType> <sequence> <element name="transportStatus" type="string"> <annotation> <documentation xml:lang="en">Execution state (enabled, halted, locked or canceled).</documentation> <documentation xml:lang="de">Ausführzungszustand (enabled, halted, locked or canceled).</documentation> </annotation> </element> </sequence> </complexType> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:GetTransportStatusResponse / jt:transportStatus

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Execution state (enabled, halted, locked or canceled). Ausführzungszustand (enabled, halted, locked or canceled).
Diagram	<pre> graph LR A[transportStatus Type string] --- B[string] </pre>
Type	string
Properties	content: simple
Source	<pre> <element name="transportStatus" type="string"> <annotation> <documentation xml:lang="en">Execution state (enabled, halted, locked or canceled).</documentation> <documentation xml:lang="de">Ausführzungszustand (enabled, halted, locked or canceled).</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:SetTransportStatus

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Message to change the execution state of a job. Nachricht um den Ausführzungszustand eines Jobs zu ändern.
Diagram	<pre> graph LR A[SetTransportStatus] --- B(authKey Type string) A --- C(jobId Type long) A --- D[transportStatus Type string] </pre>
Properties	content: complex
Model	jt:authKey , jt:jobId , jt:transportStatus
Children	jt:authKey, jt:jobId, jt:transportStatus
Instance	<pre> <jt:SetTransportStatus> <jt:authKey>{1,1}</jt:authKey> <jt:jobId>{1,1}</jt:jobId> <jt:transportStatus>{1,1}</jt:transportStatus> </jt:SetTransportStatus> </pre>
Source	<pre> <element name="SetTransportStatus"> <annotation> </pre>

	<pre> <documentation xml:lang="en">Message to change the execution state of a job.</documentation> <documentation xml:lang="de">Nachricht um den Ausführungsstatus eines Jobs zu ändern.</documentation> </annotation> <complexType> <sequence> <element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element> <element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the job which execution state is to be changed.</documentation> <documentation xml:lang="de">Identität des Jobs dessen Ausführungsstatus geändert werden soll.</documentation> </annotation> </element> <element name="transportStatus" type="string"> <annotation> <documentation xml:lang="en">Execution state (enabled or halted).</documentation> <documentation xml:lang="de">Ausführungsstatus (enabled or halted).</documentation> </annotation> </element> </sequence> </complexType> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:SetTransportStatus / jt:authKey

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Authorization key.</p> <p>Autorisierungsschlüssel.</p>
Diagram	
Type	string
Properties	content: simple
Source	<pre> <element name="authKey" type="string"> <annotation> <documentation xml:lang="en">Authorization key.</documentation> <documentation xml:lang="de">Autorisierungsschlüssel.</documentation> </annotation> </element> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:SetTransportStatus / jt:jobId


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	<p>Identity of the job which execution state is to be changed.</p> <p>Identität des Jobs dessen Ausführungsstatus geändert werden soll.</p>
Diagram	
Type	long
Properties	content: simple
Source	<pre> <element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the job which execution state is to be changed.</documentation> <documentation xml:lang="de">Identität des Jobs dessen Ausführungsstatus geändert werden soll.</documentation> </annotation> </element> </pre>

Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd
-----------------	---

Element jt:SetTransportStatus / jt:transportStatus


Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Execution state (enabled or halted). Ausführungszustand (enabled or halted).
Diagram	
Type	string
Properties	content: simple
Source	<pre><element name="transportStatus" type="string"> <annotation> <documentation xml:lang="en">Execution state (enabled or halted).</documentation> <documentation xml:lang="de">Ausführungszustand (enabled or halted).</documentation> </annotation> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Element jt:SetTransportStatusResponse

Namespace	http://soap.fax-api.de/2.0/job/types
Diagram	
Properties	content: complex
Source	<pre><element name="SetTransportStatusResponse"> <complexType/> </element></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Complex Type(s)

Complex Type jt:period

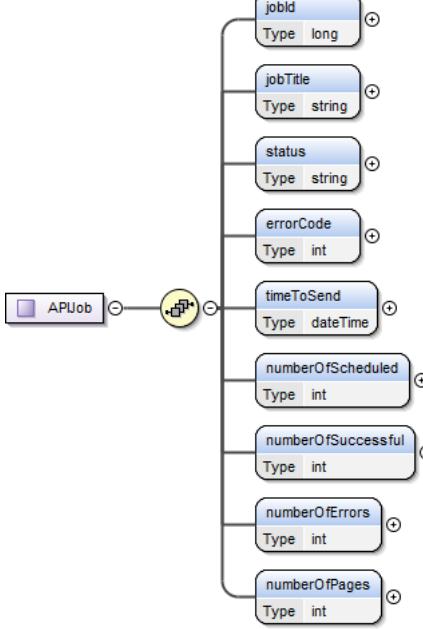
Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Type to describe a time period. Typ zur Beschreibung eines Zeitraums.
Diagram	
Used by	Elements jt:GetList/jt:period, jt:GetMembers/jt:period
Model	jt:from , jt:until
Children	jt:from, jt:until
Source	<pre><complexType name="period"> <annotation> <documentation xml:lang="en">Type to describe a time period.</documentation> <documentation xml:lang="de">Typ zur Beschreibung eines Zeitraums.</documentation> </annotation> <sequence> <element name="from" type="dateTime" minOccurs="1"> <annotation> <documentation xml:lang="en">Time the period begins.</documentation> <documentation xml:lang="de">Anfangszeit des Zeitraums.</documentation> </annotation> </element> <element name="until" type="dateTime" minOccurs="1"> <annotation> <documentation xml:lang="en">Time the period ends.</documentation> <documentation xml:lang="de">Endzeit des Zeitraums.</documentation> </annotation> </element> </sequence> </complexType></pre>

	<pre> </element> </sequence> </complexType> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Complex Type jt:JobList

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Type to describe a list of Jobs. Typ um eine Liste von Jobs zu beschreiben.
Diagram	 A UML class diagram showing a sequence of APIJob elements. A purple rounded rectangle labeled 'JobList' has a multiplicity of '0..∞' at its end, connected by a line with a hollow circle containing a cross to another line with a hollow circle containing a plus sign, which is connected to a blue rounded rectangle labeled 'Type jt:APIJob'. Both ends have hollow circles with a plus sign.
Used by	Element jt:GetListResponse/jt:jobList
Model	jt:jobList*
Children	jt:jobList
Source	<pre> <complexType name="JobList"> <annotation> <documentation xml:lang="en">Type to describe a list of Jobs.</documentation> <documentation xml:lang="de">Typ um eine Liste von Jobs zu beschreiben.</documentation> </annotation> <sequence> <element name="jobList" minOccurs="0" maxOccurs="unbounded" type="jt:APIJob"> <annotation> <documentation xml:lang="en">Job entry.</documentation> <documentation xml:lang="de">Job-Eintrag.</documentation> </annotation> </element> </sequence> </complexType> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Complex Type jt:APIJob

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Type to describe a job. Typ um einen Job zu beschreiben.
Diagram	 A UML class diagram showing an APIJob element. A purple rounded rectangle labeled 'APIJob' has a multiplicity of '0..∞' at its end, connected by a line with a hollow circle containing a cross to another line with a hollow circle containing a plus sign, which is connected to a blue rounded rectangle labeled 'Type jt:APIJob'. Both ends have hollow circles with a plus sign. Inside the APIJob class, there is a vertical list of attributes: jobId (Type long), jobTitle (Type string), status (Type string), errorCode (Type int), timeToSend (Type dateTime), numberOfScheduled (Type int), numberOfSuccessful (Type int), numberOfErrors (Type int), and numberOfPages (Type int).
Used by	Elements jt:GetJobResponse/jt:apiJob, jt:JobList/jt:jobList
Model	jt:jobId , jt:jobTitle , jt:status , jt:errorCode , jt:timeToSend , jt:numberOfScheduled , jt:numberOfSuccessful , jt:numberOfErrors , jt:numberOfPages

Children	jt:errorCode, jt:jobId, jt:jobTitle, jt:numberOfErrors, jt:numberOfPages, jt:numberOfScheduled, jt:numberOfSuccessful, jt:status, jt:timeToSend
Source	<pre> <complexType name="APIJob"> <annotation> <documentation xml:lang="en">Type to describe a job.</documentation> <documentation xml:lang="de">Typ um einen Job zu beschreiben.</documentation> </annotation> <sequence> <element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the job.</documentation> <documentation xml:lang="de">Identität des Jobs.</documentation> </annotation> </element> <element name="jobTitle" type="string"> <annotation> <documentation xml:lang="en">Name of the job.</documentation> <documentation xml:lang="de">Name des Jobs.</documentation> </annotation> </element> <element name="status" type="string"> <annotation> <documentation xml:lang="en">State of the job (new, ready, scheduling, scheduled, processing, finished, error)</documentation> <documentation xml:lang="de">Zustand des Jobs (new, ready, scheduling, scheduled, processing, finished, error)</documentation> </annotation> </element> <element name="errorCode" type="int"> <annotation> <documentation xml:lang="en">Error code: Zero if successful; see table for details.</documentation> <documentation xml:lang="de">Fehlercode: Null im Erfolgsfall; Details gemäß Liste.</documentation> </annotation> </element> <element name="timeToSend" type="dateTime"> <annotation> <documentation xml:lang="en">Scheduled time to send the fax to recipients.</documentation> <documentation xml:lang="de">Zeit zu der geplant ist, dass Fax an die Empfänger zu geschicken.</documentation> </annotation> </element> <element name="numberOfScheduled" type="int"> <annotation> <documentation xml:lang="en">Number of scheduled recipients.</documentation> <documentation xml:lang="de">Anzahl geplanter Empfänger.</documentation> </annotation> </element> <element name="numberOfSuccessful" type="int"> <annotation> <documentation xml:lang="en">Number of successful transmitted faxes to recipients.</documentation> <documentation xml:lang="de">Anzahl der erfolgreich an Empfänger versendeter Faxdokumente.</documentation> </annotation> </element> <element name="numberOfErrors" type="int"> <annotation> <documentation xml:lang="en">Number of not reachable recipients.</documentation> <documentation xml:lang="de">Anzahl der nicht erreichbaren Empfänger.</documentation> </annotation> </element> <element name="numberOfPages" type="int"> <annotation> <documentation xml:lang="en">Number of pages per recipient.</documentation> <documentation xml:lang="de">Anzahl der Seiten pro Empfänger.</documentation> </annotation> </element> </sequence> </complexType></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Complex Type jt:APIJobProfile

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Type to describe account settings in effect.

	Typ um die effektiven Kontoeinstellungen darzustellen.
Diagram	<pre> classDiagram class APIJobProfile { internationalAreaCode costcenter ecodiscount stationId faxheaderFrom faxheader faxheaderImage archiveTemplate faxType demoRecipient } </pre>
Used by	Element jt:GetJobProfileResponse/jt:apiJobProfile
Model	jt:internationalAreaCode , jt:costcenter , jt:ecodiscount , jt:stationId , jt:faxheaderFrom , jt:faxheader , jt:faxheaderImage , jt:archiveTemplate , jt:faxType , jt:demoRecipient
Children	jt:archiveTemplate, jt:costcenter, jt:demoRecipient, jt:ecodiscount, jt:faxType, jt:faxheader, jt:faxheaderFrom, jt:faxheaderImage, jt:internationalAreaCode, jt:stationId
Source	<pre> <complexType name="APIJobProfile"> <annotation> <documentation xml:lang="en">Type to describe account settings in effect.</documentation> <documentation xml:lang="de">Typ um die effektiven Kontoeinstellungen darzustellen.</documentation> </annotation> <sequence> <element name="internationalAreaCode" type="string"> <annotation> <documentation xml:lang="en">International area code of the sender.</documentation> <documentation xml:lang="de">Ländervorwahl des Absenders</documentation> </annotation> </element> <element name="costcenter" type="string"> <annotation> <documentation xml:lang="en">Cost center of customer.</documentation> <documentation xml:lang="de">Kostenstelle des Kunden.</documentation> </annotation> </element> <element name="ecodiscount" type="boolean"> <annotation> <documentation xml:lang="en">Use discount time period to send faxes.</documentation> <documentation xml:lang="de">Benutze Nebenzeiten zum Versand.</documentation> </annotation> </element> <element name="stationId" type="string"> <annotation> <documentation xml:lang="en">Fax station identifier (Sender transmitted to the recipients).</documentation> <documentation xml:lang="de">Faxgerätkennung (Absender der an die Empfänger übertragen wird).</documentation> </annotation> </element> <element name="faxheaderFrom" type="string"> <annotation> <documentation xml:lang="en">Sender text displayed in the header.</documentation> <documentation xml:lang="de">Absendertext in der Kopfzeile.</documentation> </annotation> </element> </sequence> </complexType> </pre>

	<pre> </element> <element name="faxheader" type="boolean"> <annotation> <documentation xml:lang="en">Enable or disable displaying the header.</documentation> <documentation xml:lang="de">Anzeigen der Kopfzeile ein- oder ausschalten.</documentation> </annotation> </element> <element name="faxheaderImage" type="base64Binary"> <annotation> <documentation xml:lang="en">Image of the header.</documentation> <documentation xml:lang="de">Bild der Kopfzeile.</documentation> </annotation> </element> <element name="archiveTemplate" type="boolean"> <annotation> <documentation xml:lang="en">Archive template document for fax generation.</documentation> <documentation xml:lang="de">Archiviert die Dokumentenvorlage für die FAXerzeugung.</documentation> </annotation> </element> <element name="faxType" type="string"> <annotation> <documentation xml:lang="en">Specifies the dialing behaviour of the FaxService. Allowed values are "normal" and "speedfax". "speedfax" redials busy or unreachable recipients faster.</documentation> <documentation xml:lang="de">Gibt das Anwahlverhalten des FaxService an. Zulässige Werte sind "normal" und "speedfax". "speedfax" wählt besetzte oder unerreichbare Empfänger schneller wieder an.</documentation> </annotation> </element> <element name="demoRecipient" type="string"> <annotation> <documentation xml:lang="en">Email address to receive outgoing faxes for demo purposes.</documentation> <documentation xml:lang="de">Emailadresse um ausgehende Faxe für Demozwecke zu empfangen.</documentation> </annotation> </element> </sequence> </complexType> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Complex Type jt:APIJobMemberList

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Type to describe a list of recipient configurations. Typ um eine Liste von Empfängerkonfigurationen zu beschreiben.
Diagram	<pre> classDiagram class APIJobMemberList class jtAPIJobMember APIJobMemberList "0..∞" *-- "jt:APIJobMember" </pre>
Used by	Elements jt:GetJobMembersResponse/jt:apiJobMemberList, jt:GetMembersResponse/ jt:apiJobMemberList
Model	jt:apiJobMemberList*
Children	jt:apiJobMemberList
Source	<pre> <complexType name="APIJobMemberList"> <annotation> <documentation xml:lang="en">Type to describe a list of recipient configurations.</documentation> <documentation xml:lang="de">Typ um eine Liste von Empfängerkonfigurationen zu beschreiben.</documentation> </annotation> <sequence> <element name="apiJobMemberList" minOccurs="0" maxOccurs="unbounded" type="jt:APIJobMember"> <annotation> <documentation xml:lang="en">List of recipient configurations.</documentation> <documentation xml:lang="de">Liste von Empfängerkonfigurationen.</documentation> </annotation> </element> </sequence> </complexType> </pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd

Complex Type jt:APIJobMember

Namespace	http://soap.fax-api.de/2.0/job/types
Annotations	Type to describe a single recipient setting in a job. Typ um eine einzelne Empfängereinstellung eines Jobs zu beschreiben.
Diagram	<pre> classDiagram class APIJobMember { jobid : long orgfaxnumber : string name : string customerReference : string norfaxnumber : string internationalareacode : string accountingunit : string farezone : int statuscode : int transporttime : dateTime } APIJobMember < -- jt:APIJobMemberList </pre> <p>The diagram shows the structure of the <code>APIJobMember</code> complex type. It consists of a sequence of elements: <code>jobId</code> (Type <code>long</code>), <code>orgfaxnumber</code> (Type <code>string</code>), <code>name</code> (Type <code>string</code>), <code>customerReference</code> (Type <code>string</code>), <code>norfaxnumber</code> (Type <code>string</code>), <code>internationalareacode</code> (Type <code>string</code>), <code>accountingunit</code> (Type <code>string</code>), <code>farezone</code> (Type <code>int</code>), <code>statuscode</code> (Type <code>int</code>), and <code>transporttime</code> (Type <code>dateTime</code>). The <code>APIJobMember</code> class is shown with a multiplicity of 0..1, and it is a child of the <code>jt:APIJobMemberList</code> class.</p>
Used by	Element <code>jt:APIJobMemberList/jt:apiJobMemberList</code>
Model	<code>jt:jobId , jt:orgfaxnumber , jt:name , jt:customerReference , jt:norfaxnumber{0,1} , jt:internationalareacode{0,1} , jt:accountingunit{0,1} , jt:farezone{0,1} , jt:statuscode{0,1} , jt:transporttime{0,1}</code>
Children	<code>jt:accountingunit, jt:customerReference, jt:farezone, jt:internationalareacode, jt:jobId, jt:name, jt:norfaxnumber, jt:orgfaxnumber, jt:statuscode, jt:transporttime</code>
Source	<pre> <complexType name="APIJobMember"> <annotation> <documentation xml:lang="en">Type to describe a single recipient setting in a job.</documentation> <documentation xml:lang="de">Typ um eine einzelne Empfängereinstellung eines Jobs zu beschreiben.</documentation> </annotation> <sequence> <element name="jobId" type="long"> <annotation> <documentation xml:lang="en">Identity of the job.</documentation> <documentation xml:lang="de">Identität des Jobs.</documentation> </annotation> </element> <element name="orgfaxnumber" type="string"> <annotation> <documentation xml:lang="en">Recipient fax number in original form transmitted by the sender.</documentation> <documentation xml:lang="de">Empfängerfaxnummer in der vom Versender übermittelten Originalform.</documentation> </annotation> </element> <element name="name" type="string"> <annotation> <documentation xml:lang="en">Name of the recipient.</documentation> <documentation xml:lang="de">Name des Empfängers.</documentation> </annotation> </element> <element name="customerReference" type="string"> <annotation> <documentation xml:lang="en">Customers reference</documentation> <documentation xml:lang="de">Kundenreferenz</documentation> </annotation> </element> <element name="norfaxnumber" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">Original fax number</documentation> <documentation xml:lang="de">Originalfaxnummer</documentation> </annotation> </element> </sequence> </complexType> </pre>

	<pre> <annotation> <documentation xml:lang="en">Recipient fax number in normalized form.</ documentation> <documentation xml:lang="de">Empfängerfaxnummer in normalisierter Form.</ documentation> </annotation> </element> <element name="internationalareacode" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">Internal area code of the recipient with leading zeros.</documentation> <documentation xml:lang="de">Länderkennzahl mit führenden Nullen.</documentation> </annotation> </element> <element name="accountingunit" type="string" minOccurs="0"> <annotation> <documentation xml:lang="en">Accounting unit.</documentation> <documentation xml:lang="de">Abrechnungseinheit.</documentation> </annotation> </element> <element name="farezone" type="int" minOccurs="0"> <annotation> <documentation xml:lang="en">Fare zone (1: national, 2: international 1, 3: international 2)</documentation> <documentation xml:lang="de">Tarifzone (1: national, 2: international 1, 3: international 2)</documentation> </annotation> </element> <element name="statuscode" type="int" minOccurs="0"> <annotation> <documentation xml:lang="en">State of dispatch.</documentation> <documentation xml:lang="de">Zustand des Versands.</documentation> </annotation> </element> <element name="transporttime" type="dateTime" minOccurs="0"> <annotation> <documentation xml:lang="en">Time of dispatch.</documentation> <documentation xml:lang="de">Ausführungszeit des Versands.</documentation> </annotation> </element> </sequence> </complexType></pre>
Schema location	file:/C:/Users/rattke/Zend/workspaces/Default/SoapService/main/htdocs/job.xsd